


INSTRUMENT APPROACH CHART - ICAO
AD ELEV 191 ft
HEIGHTS RELATED THR RWY 05 - ELEV 146 ft

MADEIRA INFORMATION 130.355
MADEIRA APPROACH 119.605
MADEIRA TOWER 118.355

MADEIRA / LPMA
RNP Y RWY05 (AR)

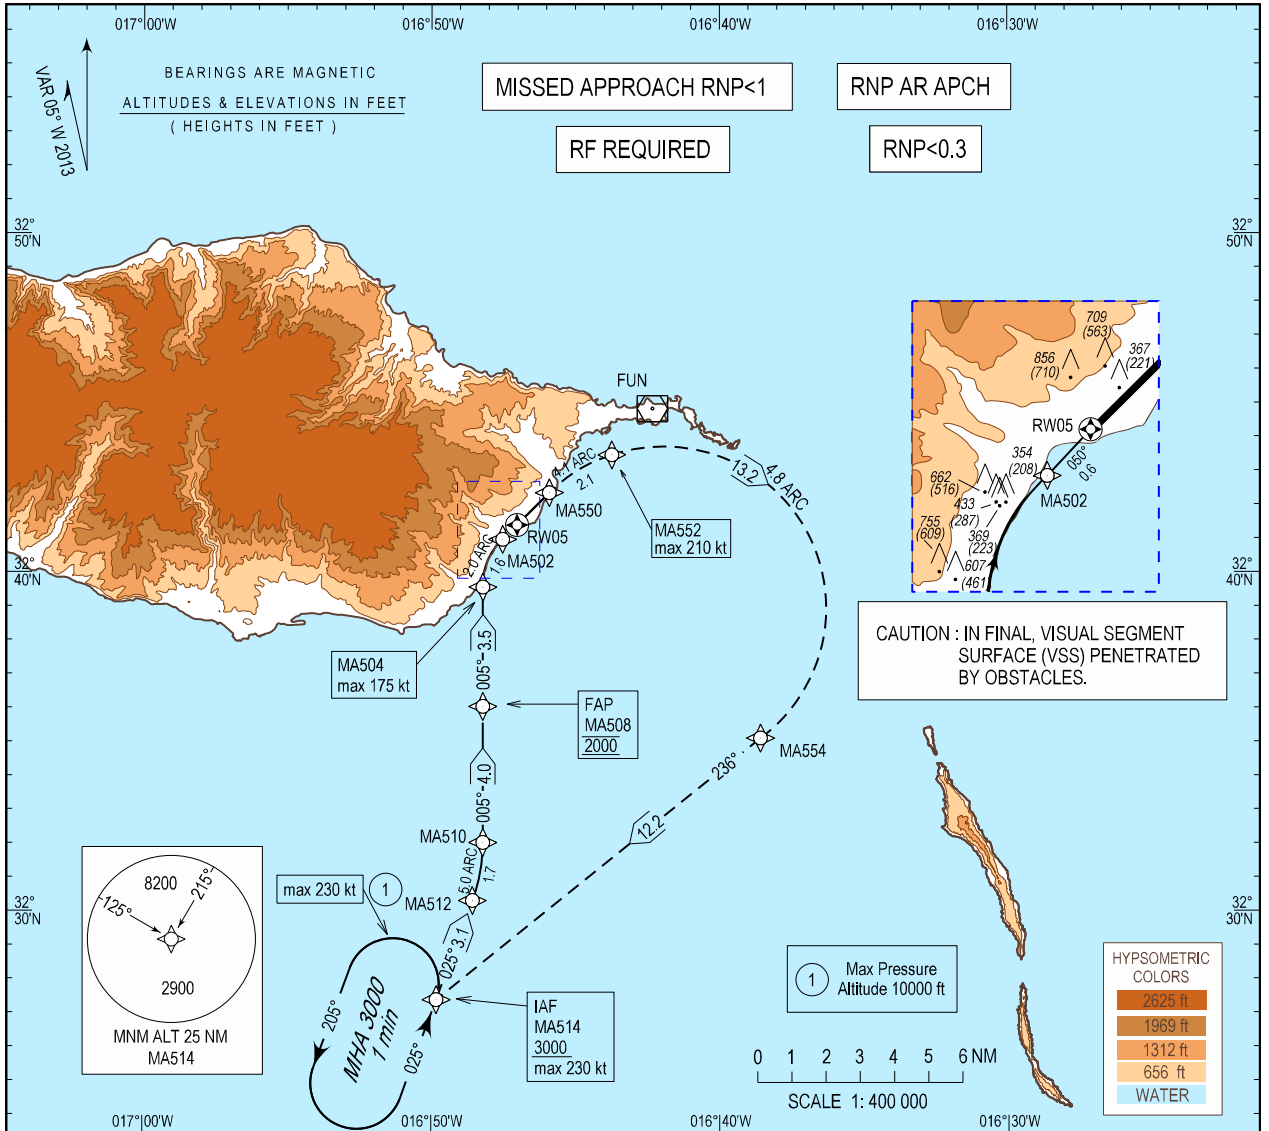

MISSED APPROACH

Climb to 3000 ft via the RNP missed approach track MA550 - MA552 - MA554 to MA514.
At MA514 hold or follow ATC instructions.

RCF: Squawk 7600.
Proceed as above.
On MA514 holding, make one complete holding pattern at 3000 ft and then proceed to perform RNP Y RWY05 Procedure.

TA: 5000

BARO-VNAV MINIMUM TEMPERATURE : +7.5°C

FAP MA508 2000

MA510 2000

MA504 890

MA502 390

RW05

1000 (854)

RDH:50
THR: 146

② RNP 0.1/0.2 is required until MA552

	CAT A		CAT B		CAT C		CAT D	
	DA(H)	OCH	DA(H)	OCH	DA(H)	OCH	DA(H)	OCH
RNP 0.3	890 (744)	739	900 (754)	751	910 (764)	759	920 (774)	770
② RNP 0.2	800 (654)	646	810 (664)	658	820 (674)	666	830 (684)	677
② RNP 0.1	500 (354)	353	520 (374)	365	520 (374)	373	530 (384)	384

WIND LIMITATION ON LANDING RWY05

Sector 300° to 010° - 15 kt wind / 25 kt gust - touchdown anemometer 2 min mean value

Sector 020° to 040° - 20 kt wind / 30 kt gust - touchdown anemometer 2 min mean value

Sector 120° to 190° - 20 kt wind / 30 kt gust - touchdown anemometer 2 min mean value

New text boxes.

Instrument Approach Procedure Coding
Table Madeira RNP Y RWY 05 (AR)

Path Terminator	Waypoint				Course/ Track MAG (True)	Dist NM	Turn Direction	ARC Centre Waypoint		ARC Radius NM
	Identifier	Type	Flyover	Coordinates				Identifier	Coordinates	
IF	MA514	IAF	-	322722.9270N 0164949.3940W	-	-	-	-	-	-
TF	MA512	-	-	323018.5390N 0164833.9620W	025.250 (020.000)	3.108	-	-	-	-
RF	MA510	IF	-	323201.4240N 0164812.5380W	-	1.747	L	MAC03	323201.2850N 0165407.3960W	5.000
TF	MA508	FAP	-	323602.4290N 0164812.5380W	005.250 (360.000)	4.009	-	-	-	-
TF	MA504	-	-	323933.5900N 0164812.5380W	005.250 (360.000)	3.512	-	-	-	-
RF	MA502	-	-	324058.1010N 0164731.4930W	-	1.559	R	MAC01	323933.5680N 0164550.3960W	2.000
TF	RW05	MAPT	Y	324123.7530N 0164701.5045W	049.914 (044.664)	0.6	-	-	-	-
TF	MA550	-	-	324224.5000N 0164550.4800W	049.919 (044.669)	1.421	-	-	-	-
RF	MA552	-	-	324327.9440N 0164344.1830W	-	2.088	R	MAC10	323931.1360N 0164223.2860W	4.1
RF	MA554	-	-	323506.4730N 0163834.8500W	-	13.159	R	MAC02	323850.7040N 0164209.4860W	4.8
TF	MA514	-	-	322722.9270N 0164949.3940W	236.255 (231.005)	12.24	-	-	-	-
HM	MA514	-	-	322722.9270N 0164949.3940W	-	-	L	-	-	-

Waypoint Identifier	Altitude	Speed	RNP Value NM	Navigation Specification	Remarks
MA514	+3000	230kt	0.3	RNP AR APCH	-
MA512	-	-	0.3	RNP AR APCH	-
MA510	+2000	-	0.3	RNP AR APCH	-
MA508	@2000	-	0.3/0.2/0.1	RNP AR APCH	-
MA504	890	175 KT	0.3/0.2/0.1	RNP AR APCH	-
MA502	390	-	0.3/0.2/0.1	RNP AR APCH	-
RW05	-	-	0.3/0.2/0.1	RNP AR APCH	-
MA550	-	-	0.3/0.2/0.1	RNP AR APCH	-
MA552	-	210 KT	0.3/0.2/0.1	RNP AR APCH	-
MA554	-	-	0.3	RNP AR APCH	-
MA514	+3000	-	0.3	RNP AR APCH	-
MA514	+3000	-	0.3	RNP AR APCH	-

RNAV Holding

HLDG ID	INBD TRACK MAG (TRUE)	Turn Direction	MAX IAS (KT)	MAX/MNM HLDG ALT FL/FT(MSL)	TIME (MIN) or DIST OUBD	Controlling Unit
MA514	025.250 (020.000)	L	230	FL100 / 3000FT	1 MIN	Madeira TWR