


STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE
6000

APP 119.400
TWR 118.300

PONTA DELGADA (LPPD)
RNAV RWY 30
BEKUN 4X

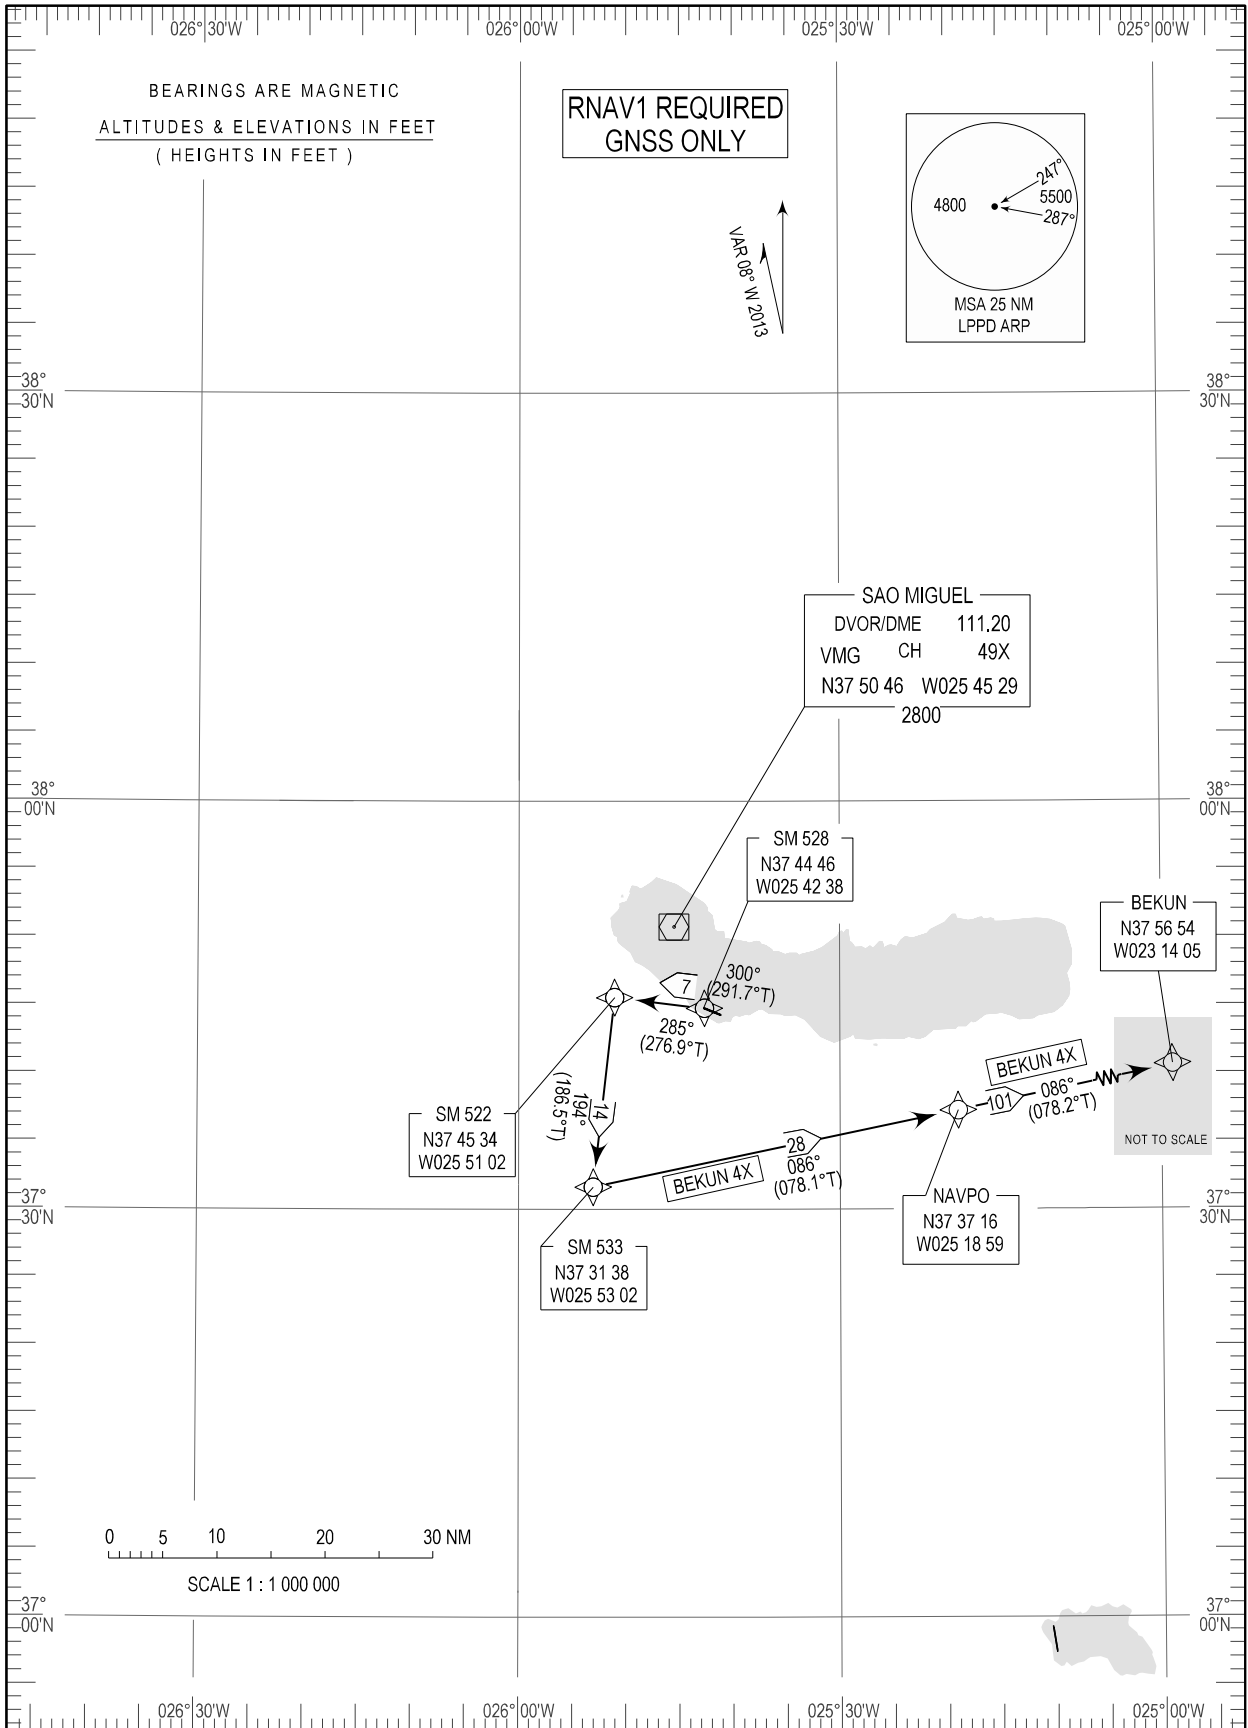

MSA changed.

SID Procedure Coding Table

Ponta Delgada SID RNAV 1 RWY 30 - BEKUN 4X

Designator	Route	After Take-off		Remarks
		Climb to ALT/FL	Contact	
BEKUN4X	After take-off proceed to SM528. Turn left to SM522 - SM533 - NAVPO - BEKUN.		Ponta Delgada APP FREQ 119.400 MHz	Cross NAVPO at or above 5500 FT

Path Terminator	Waypoint			Course/Track MAG (True)	DIST NM	Turn Direction	Constraints		Navigation Specificatin	Remarks
	Identifier	Flyover	Coordinates				Level	Speed		
CF	SM528	-	374445.80N 0254238.24W	300 (291.7)	-	-	-	-	RNAV 1	
TF	SM522	-	374533.89N 0255102.25W	285 (276.9)	6.69	Left	+1500 FT	-	RNAV 1	
TF	SM533	-	373138.29N 0255301.73W	194 (186.5)	14.00	Left	-	240Kts	RNAV 1	
TF	NAVPO	-	373716.08N 0251858.94W	086 (078.1)	27.64	Left	+5500 FT	-	RNAV 1	
TF	BEKUN	-	375653.77N 0231404.64W	086 (078.2)	100.94	-	-	-	RNAV 1	